



## All Steel Immobilizer

For cars, trailers and trucks

This highly versatile and high quality product can be installed on an extensive range of vehicles, from cars of all types, trailers of all types with a single wheel design to compressors, generators and SUVs, pickups and trucks of almost any size.

It uses the same "Screwed on tight" fit as some of our most secure wheel boots but its steel construction is less expensive.



For any car



SUVs and Pick-Ups



Trucks and tractors

### Regular version

- For any car, with a tire as wide as 245mm / 18" diameter rim
- For trailers with tires as wide as 235mm / 16" diameter rim
- No padlock with an exposed and vulnerable shackle
- Double locks for more security
- Components are painted or plated to protect against corrosion
- Installed screwed on tight with provided hand crank
- Weight: 19 lbs (Approx.)

### Large version:

- Same design and operation as small version
- For large sized tires, up to 22.5" diameter rim
- Weight : 24 lbs (Approx.)
- Still fits on smaller rims

### Large version (High Security):

- With registered, high security half-moon key
- Many units can be ordered to function with the same key


### Specifications:

- Material : Steel
- Rims are protected from scratches with rubber and vinyl.
- S'installe très rapidement et solidement.

## Installation instructions:




1. Use the key to unlock access to crank point

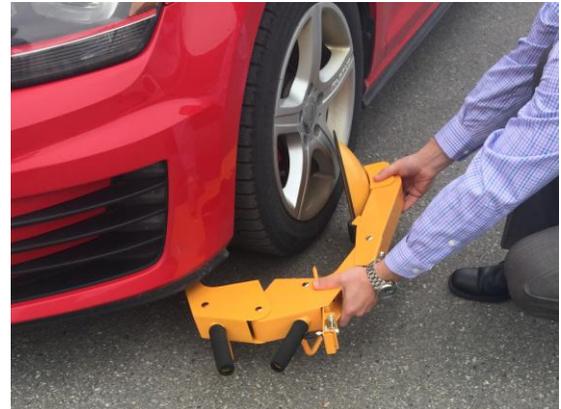


2. Apply the open jaw onto your rim



3. Tighten the boot onto your rim

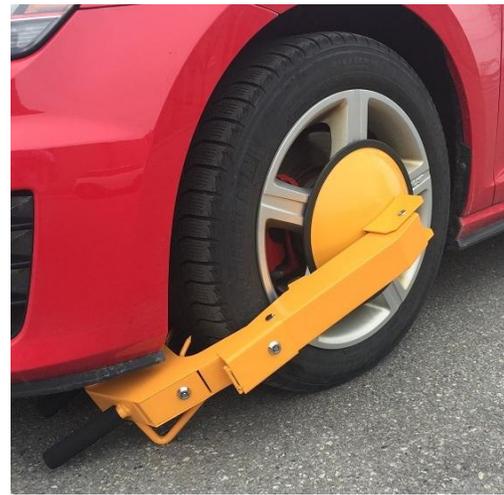

4. Close the door and remove key to complete

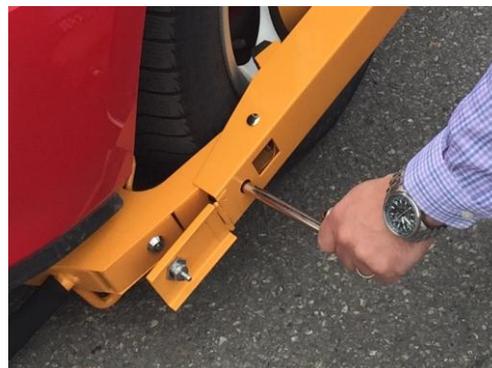

5. You may need to adjust the arm at the second crank point. Make sure the boot is held by the jaw and not the wheel cover and that the wheel cover is flush against the rim.